


SEWING ON AND OVER SILICONE RUBBER BRAID

ONE-NEEDLE AND TWO-NEEDLE LACE SEWING FEET


Loose and non-stressed sewing on of lace/tapes fed from above through needle penetration in inclined lace/tape intake area.

SPECIAL FEATURES:

- Adjustable tape guide
- Clearance heights of 0.8 mm to 4.0 mm
- The lace fed in from above becomes slack and is sewn with “additional width”
- Automatic “cornering” using a specific sewing method
- For every desired needle distance

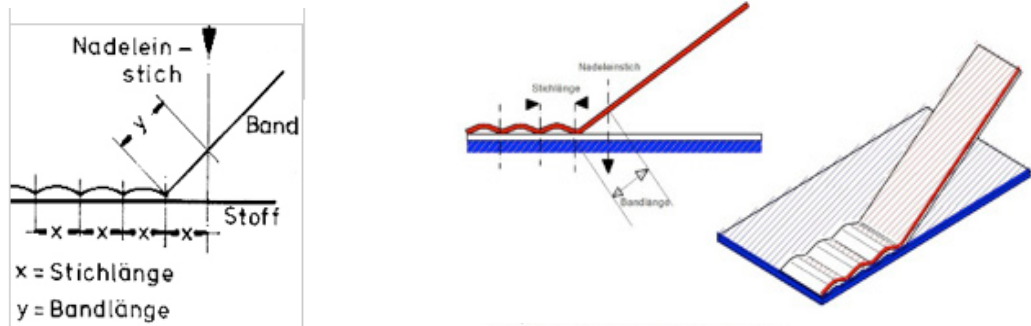

Tapes and lace fed in from above are loosely sewn on through penetration of the sewing needle in the inclined guide channel.

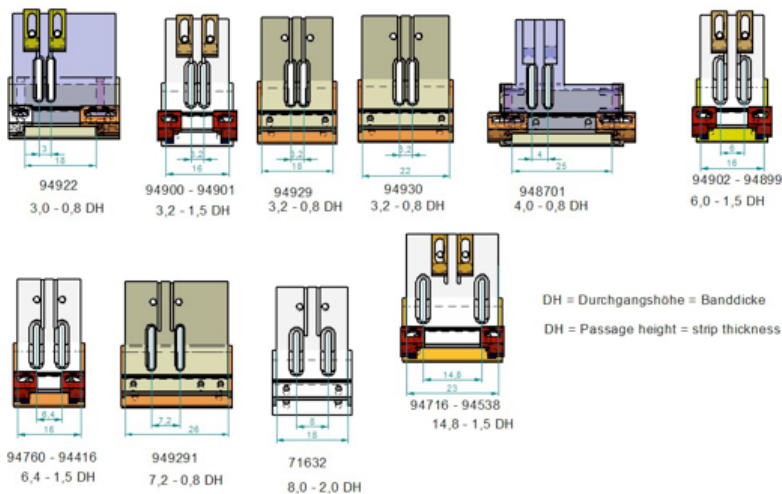

Braiding feet