


SEWING CUPS INTO THE BRA

TWO-NEEDLE-BRA UNDERWIRE SEWING FEET

The metal frame can also be sewn through a channel in the middle sewing sole. Three-part compensating foot with right and left stop sole.

SPECIAL FEATURES:

- Exact guidance of bra cup parts through left and right stop sole
- Sewing can include metal frame
- For needle distances from 4.8 mm to 7.2 mm

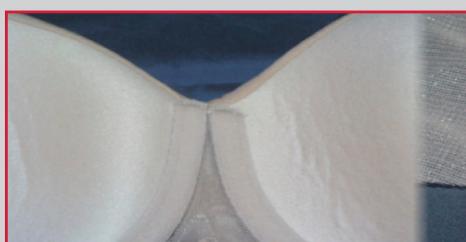

						<p>EINZELHEIT A</p>
- MK 94750-						
						<p>EINZELHEIT A</p>
- MK 94784-						

Two-Needle-Bra Underwire Sewing Feet, three-part, needle distance 4.8 mm to 8 mm
Tape widths from 8 to 12 mm

Two-needle-bra underwire sewing feet, three-part, for sewing the cup into the bra with and without a metal frame. The right and left stop sole mean the three-part compensating foot provides exact guidance of tapes fed from above or below